



BUY – SELL – REPAIR – CALIBRATE
sales@simbol.ca 1-866-396-6248



Simbol Test Systems is the one-stop shop for all your fiber optic test equipment and measurement needs. As we are exclusively focused on e-commerce and international distribution of photonic products since 2000, our customers rely on the [AssetRelay](#) catalog to find our stock listings of thousands of used and refurbished popular test equipment. They know they can get repair, customization and calibration services from our laboratory for their own fiber optic instruments from all renowned brand manufacturers.

If you wish to buy optical equipment or get it repaired, don't hesitate to contact either our used sales division www.assetrelay.com or our distribution and repair service group at www.simbol.ca.

If you need repairs, trust the Simbol Test Systems expertise

With more than 25 years of expertise in repairing OSA, Tunable Lasers, Wavemeters, Laser drivers and controllers, Power meters, Optical Switches and many more, the quality of our services is renowned amongst the service centers community and highly appreciated by our partners and customers. We developed custom software allowing us to perform automatic calibration tests and write up to date results in Ando (Yokogawa) the Optical Spectrum Analyzer calibration tables. We developed many calibration procedures with custom software allowing fast testing of attenuators, switches, wavemeters and TLS. In fact, Simbol is the most experienced repair center for HP, Agilent and Keysight large Tunable Laser modules. Don't settle for a two-page summary assessment to trust that the optical equipment you send out for repair or calibration is operating properly; our report contains the complete table of all results, confirming it has **really** been tested. A report from other labs with little data reflects a not completely calibrated unit. So be careful of other sellers saying their equipment is "tested good", "powered on, self-tested", "pulled from a working environment".

If you need to buy a machine, trust AssetRelay

All equipment sold by AssetRelay is serviced by Simbol Test Systems and will go through a series of tests to ensure it meets or exceeds the manufacturer's published specifications. But if stated otherwise, all equipment is shipped with a comprehensive calibration/test report showing all tests performed and passed. A dated calibration sticker is affixed on the machine. When you choose AssetRelay, you can be confident that we actually test everything we sell so you know it will work when it gets to your workplace. If you are an international buyer (we are based in Canada), we manage most documents needed so your equipment gets through the border of your country swiftly. We have been doing this for over 25 years and know that proper customs documents are needed.

Traceability: Instrumentation used during this calibration is traceable to N.I.S.T (National Institute of Standards and Technology) or C.N.R.C. (Canadian National Research Council).

HP 86060 Series Lightwave Switches

Product Overview

Performance Characteristics and Ordering Information

HP 86060B Compact Lightwave Switch
HP 86062B Full-Size Lightwave Switch



Lightwave Switching for Test Automation

- **Visual signal path display with easy-to-use manual interface**
- **Multilayer software for controlling multiple switch configurations available**
- **Repeatable switching with 10 million cycle minimum life**
- **Custom configurations available**
- **HP-IB and RS-232 control**
- **SCPI-compatible commands**
- **RS-485 expansion bus available**

The HP 86060 series of programmable lightwave switches cover a broad range of switching capacity and provide easy signal routing for accurate and repeatable measurement automation. These switches provide an important building block for implementing automated test systems.

The HP 86060 switch family features an easy-to-use manual interface and a visual signal routing display. The interface allows quick manual operation for initially setting up a measurement or for quick investigation of test device performance. Selected switch positions can be saved and recalled. The switches can be easily integrated into automated test systems using SCPI-compatible commands via HP-IB or RS-232 interfaces.

Hewlett-Packard's lightwave switches are designed for long, reliable service with excellent repeatability, low back reflections, and low insertion loss for accurate lightwave measurements.

The HP 86060B is a compact switch available with four to eight output channels and one or two inputs. The switch is designed for easy configuration with HP optical attenuators, lightwave multimeters, OTDRs, and other lightwave test instrumentation for either benchtop or automated system applications. In addition, the HP 86060B can be special ordered in a mid-size half-width chassis, that can accommodate one or two inputs, and up to fifteen front or eighteen rear panel outputs.

The HP 86062B is a full-width instrument with 4 to 100 output channels. It is designed for automated production and evaluation testing of large numbers of devices. The HP 86060 Series Lightwave Switches are designed for 9/125 μm single-mode, as well as 62.5/125 and 50/125 μm multi-mode operation. Switching is bi-directional. The 1xN switching module is built around a precision stepper motor.

Standard configurations include fiber "pigtailed" or FC, SC, or ST connectors. Other connector types including DIN, Diamond or angled physical contact are available on request. (Unlike most Hewlett-Packard products, these connector types are not interchangeable.)

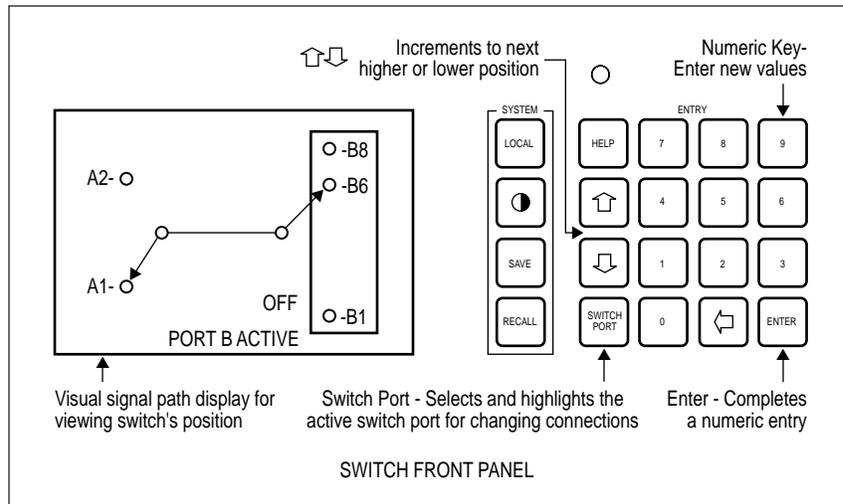


Figure 1. HP's manual interface and visual signal routing display (top diagram).

New Multilayer Control Software for Integrated Multiple Switch Applications

Integrated multi-layer control software is available through special order for both HP 86060B and 86062B switches. This software enables multiple switches to be controlled from a single manual or automated control unit. A single interface can control up to four switching layers with each layer supporting one or two switches.

Figure 2 shows a manufacturing test application which requires two switches. Both of these switches can now share a single cabinet and be easily controlled through a single manual interface. Figures 3 and 4 show the two switches as they would appear on the display of an HP 86062B with the new multilayer software. Figure 3 shows the source side of the testing platform in layer S1 on the HP 86062B's display. The test system is currently using the 1550 nm test source. The second switch in the S1 layer is used to choose which of the devices under test is currently being tested. In the example shown, we are testing the 3rd device, which is referred to as port B3 in layer S1. To complete the test, the 1 x 4 switch at the receiving end of the testbed is set to port D3 (see Figure 4). This is shown as layer S2 on the manual interface. The new multilayer software allows the user to graphically see both switches with just one touch of a button. The instrument's display also shows confirmation of each layer's status when the switches are being controlled remotely (HP-IB or RS-232), thus making it easy to write and troubleshoot programs for automated testing.

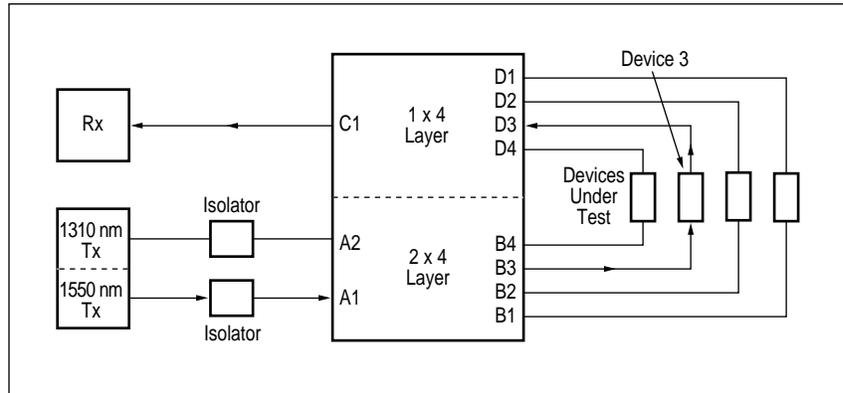


Figure 2. Automated testbed for connector, cable, component, and device testing

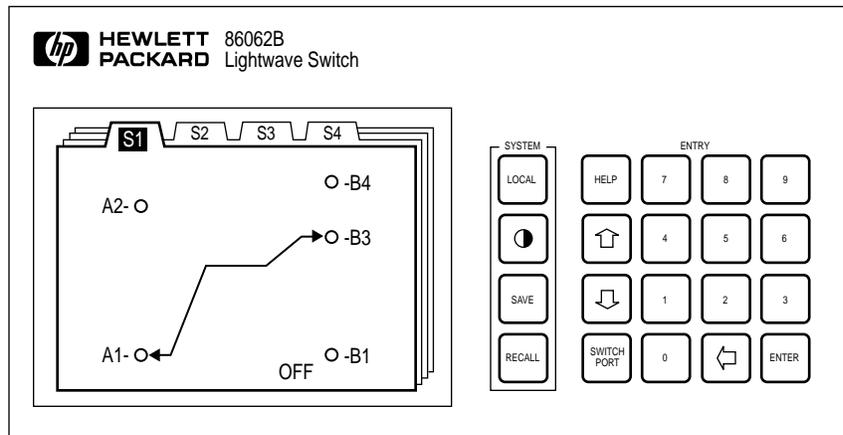


Figure 3. Layer S1 showing input side of automated testbed shown in Figure 2

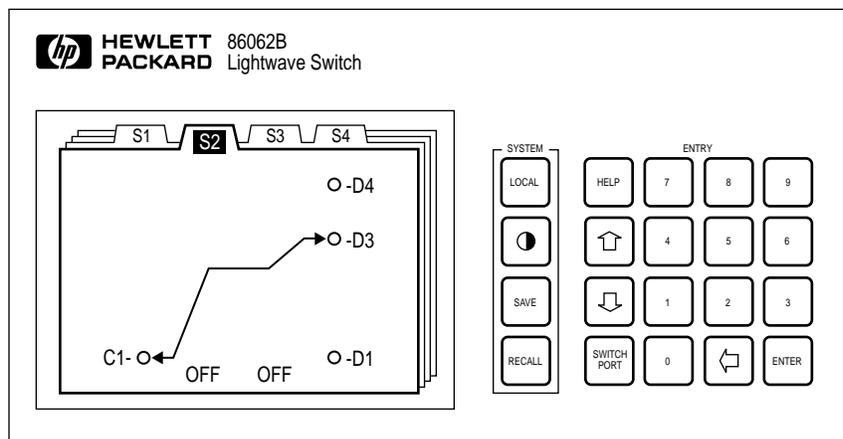


Figure 4. Layer S2 showing receive side of automated testbed shown in Figure 2

Applications

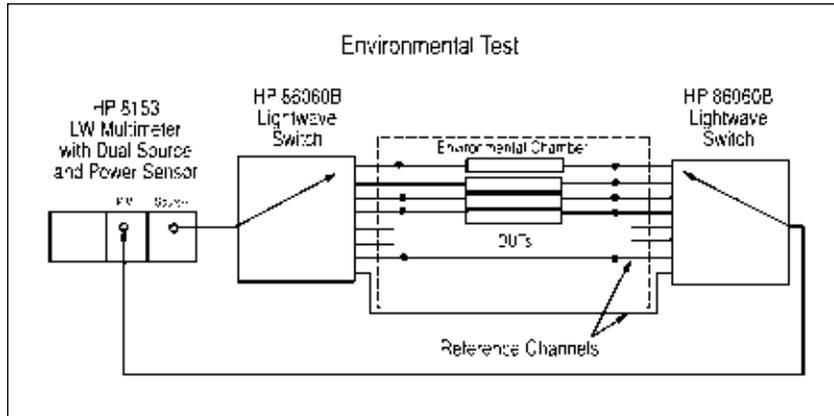


Figure 5. Insertion loss as a function of temperature

A well-implemented automated test system can help reduce manufacturing costs. An automated test system can perform a wide range of tests without the need to manually reset operating conditions. Measurements can be performed and recorded much more rapidly than with a manual system. Automated systems can be implemented to reduce the necessary operator skill level and amount of training required. Automated systems can also reduce the time spent recording, recovering, and publishing test results.

Increasing measurement throughput by greatly reducing time per test, a single automated test system can do the work of several manual stations, thereby reducing both cost per test and the total capital investment (and depreciation) required for the test.

Qualification testing can be very expensive, with the additional cost of operating an environmental chamber on top of tying up lots of test equipment for long periods to test multiple devices. Figure 5 shows an automated environmental test system using two HP 86060B Lightwave Switches and an HP 8153 Lightwave Multimeter with the HP 81554SM Dual Laser Source module and the HP 81532A Power Sensor module. Multiple devices are under test (perhaps isolators, patch-cords, or attenuators). Insertion loss is measured versus temperature. Reference channels are used for system calibration and

to compensate for system drift. This system could be expanded to test return loss versus temperature with the addition of a coupler and a reflectance standard. This test system can also be set up using a single HP 86062B switch with two layers.

Multi-port device testing can complicate manufacturing test. Flexible lightwave switch configurations provide a versatile building block for test systems design. Figure 6 shows an eight channel WDM/router test setup which uses a multi-layered HP 86062B switch with three switching modules. The HP 11896A Polarization Controller allows the devices under test to be tested for amplitude and wavelength polarization dependency. The HP 71452B Optical Spectrum Analyzer provides spectral characteristics such as free spectral range, channel bandwidth, and isolation/crosstalk. The HP 86120B Multi-Wavelength Meter is used to make extremely accurate channel wavelength and channel spacing measurements. The switch configuration provides for an 8 x 8 or multiple 1 x 8 test device configurations.

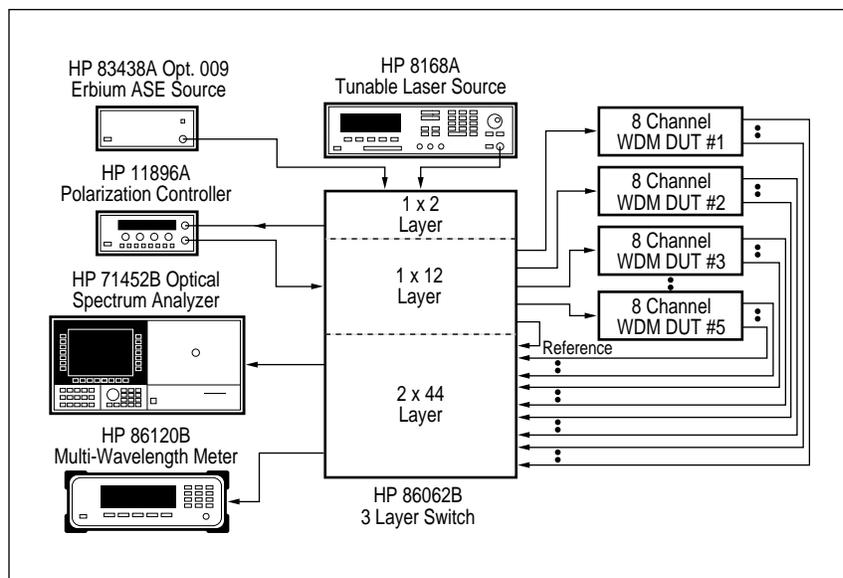


Figure 6. Eight channel WDM/router test setup

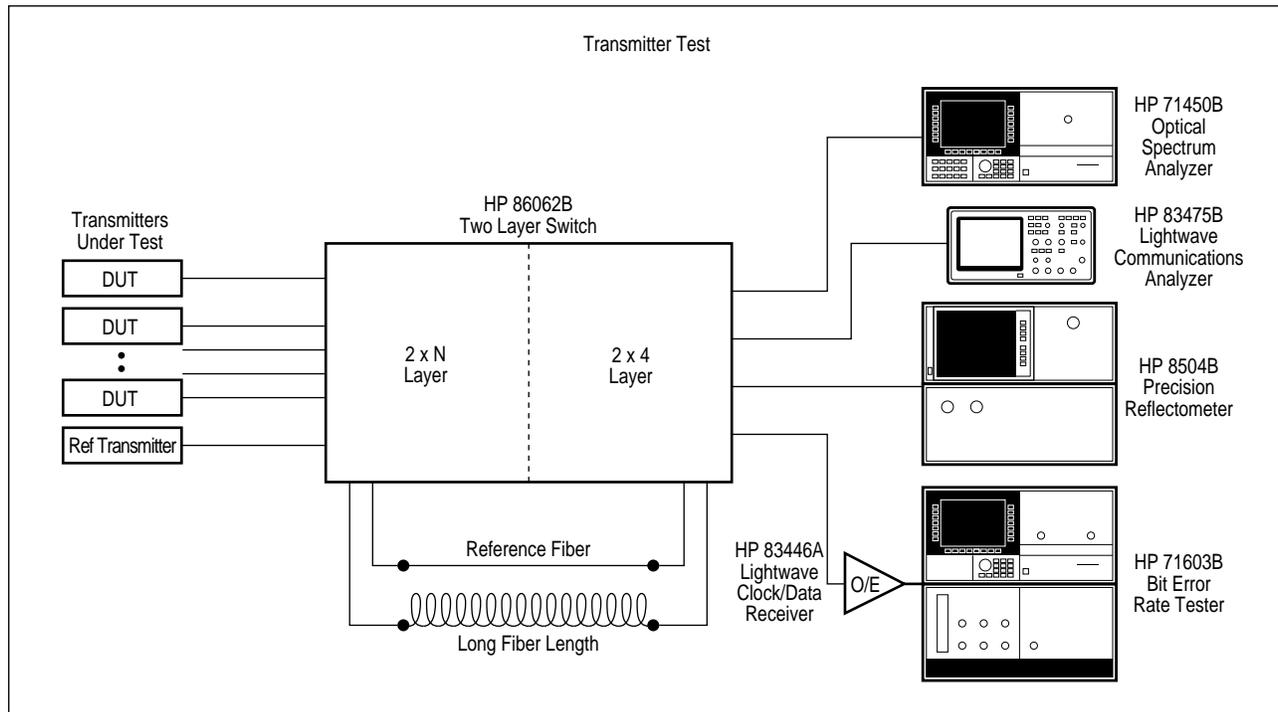


Figure 7. Automated transmitter test system

Products aimed at new telecommunications systems require extensive testing to industry standards such as ITU-TS (formerly CCITT) G.957 for the Synchronous Digital Hierarchy, and other standards for SONET and ATM. Increasingly, the performance of products for these markets must be well documented and supplied with the product. Manufacturers continue to strive to use testing as one tool to improve process performance and yields. Potential suppliers are carefully evaluated to insure that their products and components will meet overall system performance requirements. Environmental tests are frequently necessary to be certain that designs are robust compared to the operating conditions that must be met.

Figure 7 shows a system for performing extensive parametric measurements, such as those required for SDH and SONET, on multiple transmitters. The system provides for testing the spectral characteristics with the HP 71450B Optical Spectrum Analyzer. The system performs eye-diagram measurements using the HP 83475B Lightwave Communications Analyzer. The HP 8504B Precision Reflectometer is calibrated to remove the path length to the transmitters, and provides detailed measurement of the different sources of reflection in the transmitter. The HP 71603B Bit Error Rate Tester, together with the HP 83446A Lightwave Clock/Data Receiver, is used to monitor bit error rate performance.

The system can be expanded to construct a transceiver test system. Additional channels would be needed on the right hand switch. Microwave switching can be added in front of the HP 71603B BERT to sequentially measure the bit error rate performance of the receivers.

Hewlett-Packard has been supplying both standard microwave switches and custom microwave switch matrices for many years.

Specifications and Characteristics

Specifications describe the instrument's warranted performance (including measurement uncertainty) over the +5°C to +40°C temperature range, with RH from 0 to 80%, except where noted. **Characteristics** provide information about non-warranted instrument performance in the form of nominal values. Characteristics are at room temperature.

HP 86060B and 86062B Optical Switches

	Specifications ¹ (and Characteristics)
Insertion Loss² Single-mode Switches Multimode Switches	2.0 dB (1.0 dB) 1.5 dB (1.0 dB)
Repeatability³	±0.02 dB (±0.01 dB)
Optical Return Loss⁴ Single-mode Switches Multimode Switches	55 dB (58 dB) 20 dB (25 dB)
Polarization Dependent Loss⁵	0.05 dB (0.01 dB)
Isolation	-80 dB (-100 dB)
Typical Switching Life	10 million cycles

¹ Switches may be ordered with one input (option 001) or two inputs (special option H32). Switches are available with 4, 8, 12... or 100 outputs.





² Insertion loss does not include connectors. Include an additional 0.25 dB (characteristic) for each connector.



³ Repeatability measured after four hours warmup and with an eight second pause between switch movements. The repeatability specification applies to adjacent channels (sequential) only.

⁴ Excludes external pigtail backscatter and connector reflections.

⁵ Polarization Dependent Loss only applies to single-mode switches and is measured at 1550 nm.

The following tables show the distribution of production line measurements of HP standard switches at room temperatures.

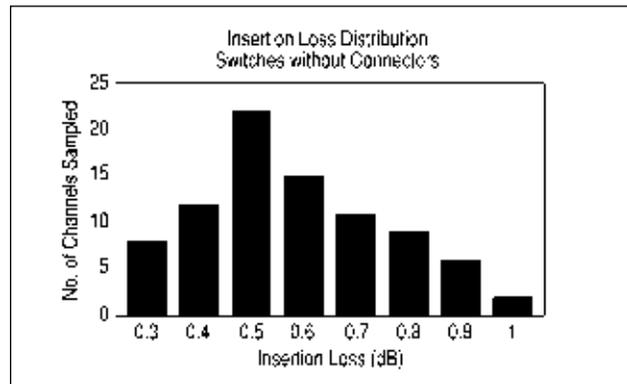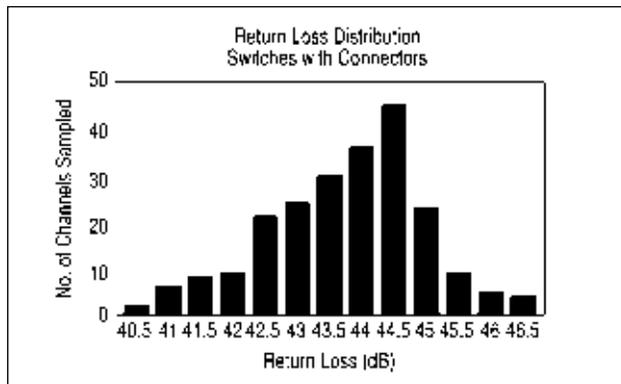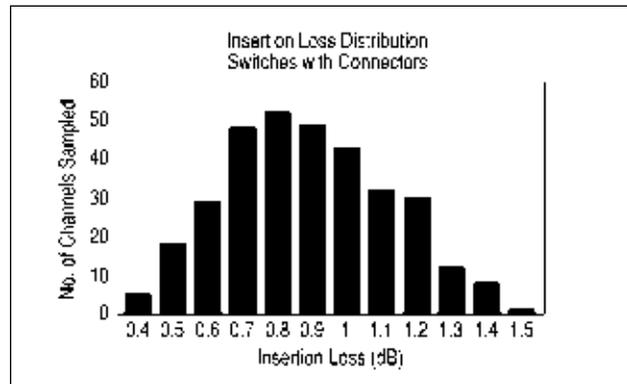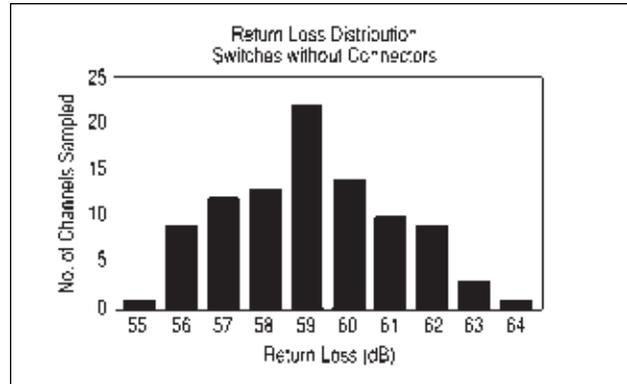

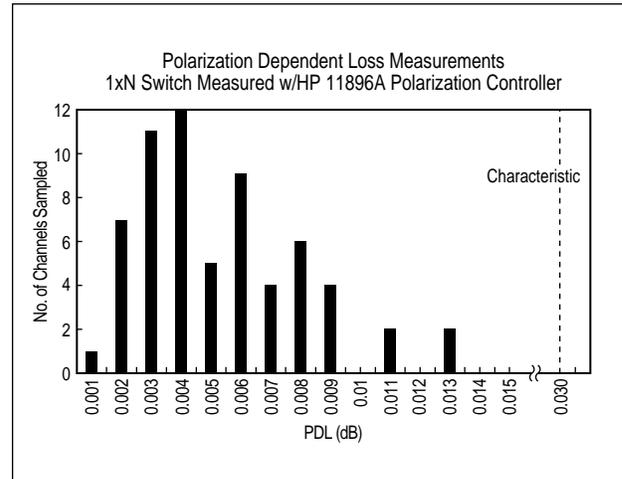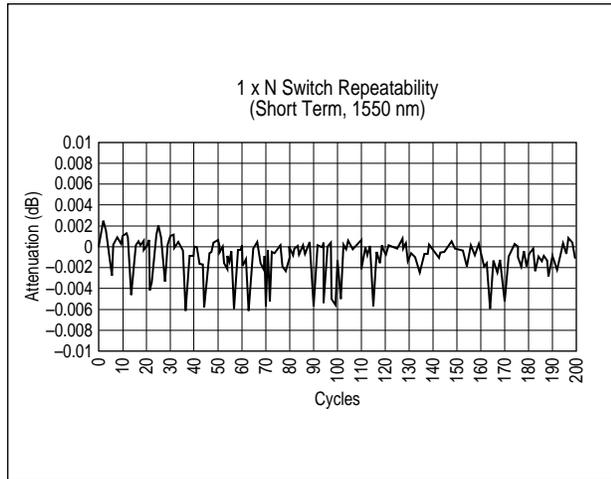

Switching Time (msec)

	Between Adjacent Channels	Plus Additional Time/Channel	Maximum Switching Time
HP 86060B	290	40	530
HP 86062B	260	10	993

250 msec settling time is allowed for best repeatability

General Specifications

Temperature Range:

Operational: +5 to +40°C, <80% R.H.

Storage: -20 to +45°C

Power Requirements:

100, 120, 220, or 240 volts ($\pm 10\%$), 47 to 63 Hz

Power Consumption: <75 VA

Weight: (dependent on the number of channels)

HP 86060B: 3.76 to 4.1 Kg (8.4 to 9.2 lbs)

HP 86060B Mid-Size Special: 4.0 to 6.18 kg (8.8 to 13.6 lbs)

HP 86062B: 7.72 to 13.74 Kg (17.25 to 30.7 lbs)

Dimensions: (H x W x D)

HP 86060B: 132.6 x 213 x 345.4 mm

(5.25 x 8.39 x 14 in.)

HP 86060B Mid-Size Special: 177 x 213 x 345.4 mm

(7 x 8.39 x 14 in.)

HP 86062B: 177 x 425 x 345.4 mm

(7 x 16.75 x 14 in.)

Ordering Information

HP 86060B Compact Lightwave Switch

Switch Configuration *(must select one only)*

- Option 001 Single input channel
- Option H32 Two input channels (special order)

Wavelength and Fiber Type *(must select one only)*

- Option 109 1280–1650 nm, 9/125 μm single-mode fiber
- Option 162 1280–1650 nm, 62.5/125 μm multimode fiber
- Option H63 800–1350 nm, 62.5/125 μm multimode fiber (special order)
- Option H50 1280–1650 nm, 50/125 μm multimode fiber (special order)
- Option H51 800–1350 nm, 50/125 μm multimode fiber (special order)

Port Type *(must select one only)*

- Option 050 Connectors on front panel (only available with option 204)
- Option 051 Connectors on rear panel (for connectorized outputs only)
- Option 052 1 meter fiber out the rear panel (for connectorized outputs, connector is at the end of the 1 meter fiber)

Output Channels

of Connectorized Outputs *(must select one only)*

- Option 2XX where XX is the # of connectorized output channels (from 04 to 08)

Connector Type *(must select one only)*

- Option 012 FC Connectors
- Option 014 ST Connectors
- Option 017 SC Connectors
- FC/APC or SC/APC Connectors (special orders)

or

of Non-connectorized Outputs *(must select one only)*

- Option 3XX where XX is the # of non-connectorized output channels (from 04 to 08)

Special Orders

- Please contact your local HP representative

HP 86062B Full-Size Lightwave Switch

Switch Configuration *(must select one only)*

- Option 001 Single input channel
- Option H32 Two input channels (special order)

Wavelength and Fiber Type *(must select one only)*

- Option 109 1280–1650 nm, 9/125 μm single-mode fiber
- Option 162 1280–1650 nm, 62.5/125 μm multimode fiber
- Option H63 800–1350 nm, 62.5/125 μm multimode fiber (special order)
- Option H50 1280–1650 nm, 50/125 μm multimode fiber (special order)
- Option H51 800–1350 nm, 50/125 μm multimode fiber (special order)

Port Type *(must select one only)*

- Option 051 Connectors on rear panel (for connectorized outputs only)
- Option 052 1 meter fiber out the rear panel (for connectorized outputs, connector is at the end of the 1 meter fiber)

Output Channels

of Connectorized Outputs *(must select one only)*

- Option 204 4 Connectorized outputs
- Option 208 8 Connectorized outputs
- Option 212 12 Connectorized outputs
- Option 216 16 Connectorized outputs
- Option 220 20 Connectorized outputs
- Option 224 24 Connectorized outputs
- Option 228 28 Connectorized outputs
- Option 232 32 Connectorized outputs
- Option 236 36 Connectorized outputs
- Option 240 40 Connectorized outputs
- Option 244 44 Connectorized outputs
- Option 248 48 Connectorized outputs
- Option 252 52 Connectorized outputs
- Option 256 56 Connectorized outputs
- Option 260 60 Connectorized outputs
- Option 264 64 Connectorized outputs
- Option 268 68 Connectorized outputs
- Option 272 72 Connectorized outputs
- Option 276 76 Connectorized outputs
- Option 280 80 Connectorized outputs
- Option 284 84 Connectorized outputs
- Option 288 88 Connectorized outputs
- Option 292 92 Connectorized outputs
- Option 296 96 Connectorized outputs
- Option 200 100 Connectorized outputs

Connector Type *(must select one only)*

- Option 012 FC/PC Connectors
- Option 014 ST Connectors
- Option 017 SC Connectors
- FC/APC or SC/APC Connectors (special orders)

or


of Non-connectorized Outputs *(must select one only)*

- Option 304 4 Non-connectorized outputs
- Option 308 8 Non-connectorized outputs
- Option 312 12 Non-connectorized outputs
- Option 316 16 Non-connectorized outputs
- Option 320 20 Non-connectorized outputs
- Option 324 24 Non-connectorized outputs
- Option 328 28 Non-connectorized outputs
- Option 332 32 Non-connectorized outputs
- Option 336 36 Non-connectorized outputs
- Option 340 40 Non-connectorized outputs
- Option 344 44 Non-connectorized outputs
- Option 348 48 Non-connectorized outputs
- Option 352 52 Non-connectorized outputs
- Option 356 56 Non-connectorized outputs
- Option 360 60 Non-connectorized outputs
- Option 364 64 Non-connectorized outputs
- Option 368 68 Non-connectorized outputs
- Option 372 72 Non-connectorized outputs
- Option 376 76 Non-connectorized outputs
- Option 380 80 Non-connectorized outputs
- Option 384 84 Non-connectorized outputs
- Option 388 88 Non-connectorized outputs
- Option 392 92 Non-connectorized outputs
- Option 396 96 Non-connectorized outputs
- Option 300 100 Non-connectorized outputs

Special Orders

- Please contact your local HP representative

Configuration Guide

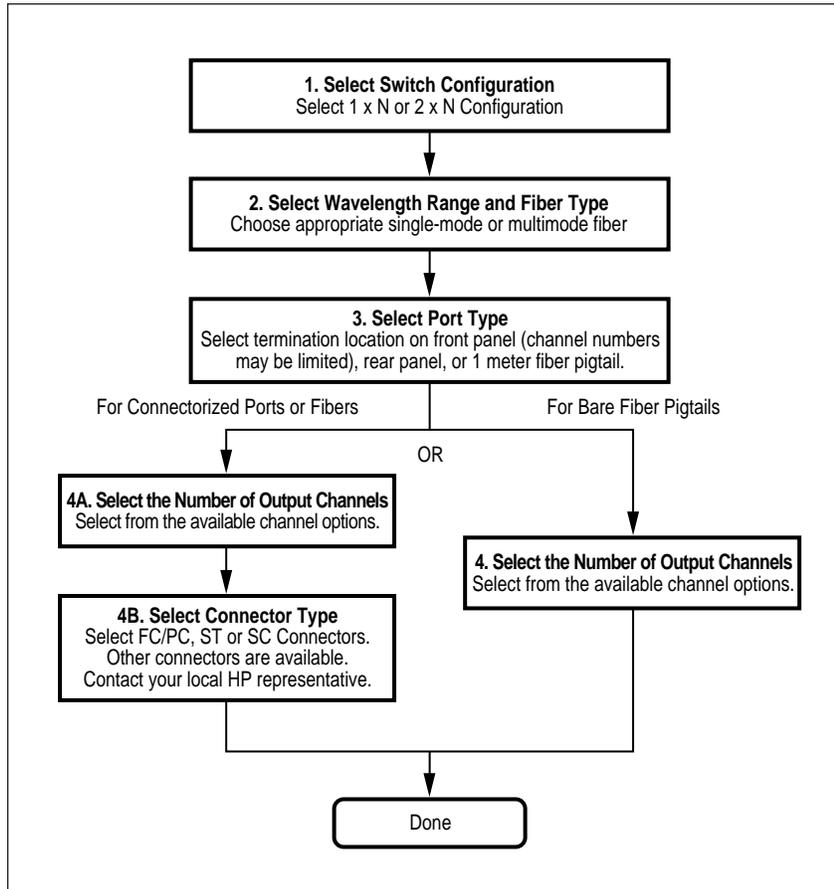

Configuration flowchart

Configuration examples

HP 86062B Full-Size Lightwave Switch

Opt 001 One input channel

Opt 109 1280 to 1650 nm, 9/125 μm single-mode fiber

Opt 051 Connectors on rear panel

Opt 208 8 Connectorized outputs

Opt 017 SC Connectors

HP 86062B Full-Size Lightwave Switch

Opt H32 Two input channels (Special order)

Opt 109 1280 to 1650 nm, 9/125 μm single-mode fiber

Opt 051 Connectors on rear panel

Opt 244 44 Outputs

Opt 017 SC Connectors



For more information about Hewlett-Packard test and measurement products, applications, services, and for a current sales office listing, visit our web site, <http://www.hp.com/go/tmdir>. You can also contact one of the following centers and ask for a test and measurement sales representative.

United States:

Hewlett-Packard Company
Test and Measurement Call Center
P.O. Box 4026
Englewood, CO 80155-4026
1 800 452 4844

Canada:

Hewlett-Packard Canada Ltd.
5150 Spectrum Way
Mississauga, Ontario
L4W 5G1
(905) 206 4725

Europe:

Hewlett-Packard
European Marketing Centre
P.O. Box 999
1180 AZ Amstelveen
The Netherlands
(31 20) 547 9900

Japan:

Hewlett-Packard Japan Ltd.
Measurement Assistance Center
9-1, Takakura-Cho, Hachioji-Shi,
Tokyo 192, Japan
Tel: (81) 426 56 7832
Fax: (81) 426 56 7840

Latin America:

Hewlett-Packard
Latin American Region Headquarters
5200 Blue Lagoon Drive, 9th Floor
Miami, Florida 33126, U.S.A.
Tel: (305) 267-4245
(305) 267-4220
Fax: (305) 267-4288

Australia/New Zealand:

Hewlett-Packard Australia Ltd.
31-41 Joseph Street
Blackburn, Victoria 3130, Australia
1 800 629 485

Asia Pacific:

Hewlett-Packard Asia Pacific Ltd.
17-21/F Shell Tower, Times Square,
1 Matheson Street, Causeway Bay,
Hong Kong
Tel: (852) 2599 7777
Fax: (852) 2506 9285

**Data Subject to Change
Copyright © 1997
Hewlett-Packard Company
Printed in U.S.A. 10/97
5964-9008E**